




VFT


Winkelverschraubungen

Eigenschaften

- Geeignet für den Einsatz bis zu 4.150 bar/ 60.000 psi oder 6.200 bar/ 90.000 psi
- Verfügbar in metrisch oder imperial
- Sonderabmessungen auf Anfrage



Technische Daten

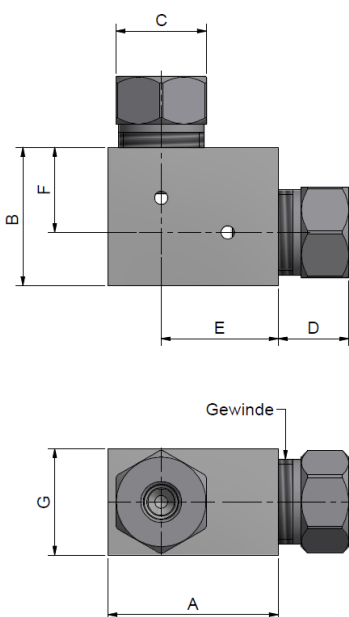

Artikel Nummer	Max. Druck [bar/psi]	Gewinde	Dimensionen						
			A	B	C	D	E	F	G
1/4"									
201414	4150 / 60,000	M16 x 1.5	32	26	17	13	22	16	20
201414-I	4150 / 60,000	9/16" - 18 UNF	38	25	5/8"	13	22	16	19
201414-P	6200 / 90,000	M16 x 1.5	32	26	17	13	22	16	20
201414-I-P	6200 / 90,000	5/8" - 18 UNF	38	25	11/16"	13	22	16	19
3/8"									
203838	4150 / 60,000	M20 x 1.5	48	35	22	13	35	22	25
203838-I	4150 / 60,000	3/4" - 16 UNF	50	38	13/16"	12	31.5	25.5	25
203838-P	6200 / 90,000	M20 x 1.5	48	35	22	13	35	22	25
203838-I-P	6200 / 90,000	3/4" - 16 UNF	50	38	13/16"	12	31.5	25.5	25
9/16"									
209191	4150 / 60,000	M30 x 2	65	52	32	18	45	32	40
209191-I	4150 / 60,000	1 1/8" - 12 UNF	67	48	1 3/16"	18	48	28.5	40
209191-P	6200 / 90,000	M30 x 2	65	52	32	18	45	32	40

Weitere Informationen unter

ALLFI website : allfi.com
 ALLFI webshop : allfiwaterjetparts.com
 Kontakt : info@allfi.com

Superior Waterjet Parts

