



Eigenschaften

- Geeignet für den Einsatz bis zu 4.150 bar/ 60.000 psi oder 6.200 bar/ 90.000 psi
- Verfügbar in metrisch oder imperial
- Sonderabmessungen auf Anfrage



Technische Daten

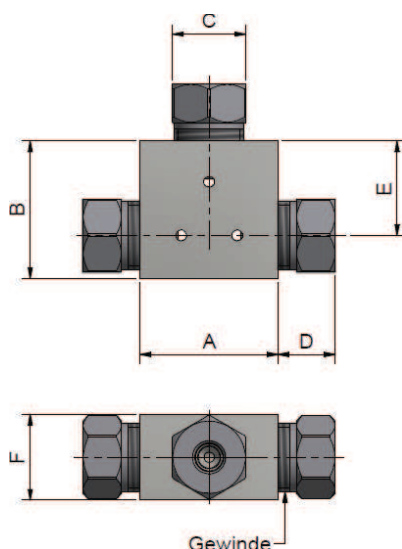

Artikel Nummer	Max. Druck [bar/psi]	Gewinde	Dimensionen [mm]					
			A	B	C	D	E	F
1/4"								
301414	4150 / 60,000	M16 x 1.5	32	32	17	13	22	20
301414-I	4150 / 60,000	9/16" - 18 UNF	50	32	5/8"	13	22	25
301414-P	6200 / 90,000	M16 x 1.5	32	32	17	13	22	20
301414-I-P	6200 / 90,000	5/8" - 18 UNF	50	32	11/16"	13	22	25
3/8"								
303838	4150 / 60,000	M20 x 1.5	50	40	22	13	27	25
303838-I	4150 / 60,000	3/4" - 16 UNF	50	40	13/16"	12	27	25
303838-P	6200 / 90,000	M20 x 1.5	50	40	22	13	27	25
303838-I-P	6200 / 90,000	3/4" - 16 UNF	50	40	13/16"	12	27	25
9/16"								
309191	4150 / 60,000	M30 x 2	65	65	32	18	45	40
309191-I	4150 / 60,000	1 1/8" - 12 UNF	67	54	1 3/16"	18	35	40
309191-P	6200 / 90,000	M30 x 2	65	65	32	18	45	40
309191-I-P	6200 / 90,000	1 1/8" - 12 Unf	67	54	1 3/16"	18	35	40

Weitere Informationen unter

ALLFI website : allfi.com
 ALLFI webshop : allfiwaterjetparts.com
 Kontakt : info@allfi.com

Superior Waterjet Parts

