




VFT


Einstellbarer Doppelnippel

Eigenschaften

- Geeignet für den Einsatz bis zu 4.150 bar/ 60.000 psi oder 6.200 bar/ 90.000 psi
- Verfügbar in metrisch oder imperial
- Sonderabmessungen auf Anfrage



Technische Daten

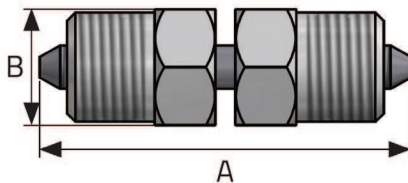

Artikel Nummer	Max. Druck [bar/psi]	Gewindeabmessungen	Maße [mm]	
			A	B
1/4"				
611414	4.150 / 60.000	M16 x 1.5	55	17
611414-I	4.150 / 60.000	9/16" - 18UNF	55	5/8"
611414-P	6.200 / 90.000	M16 x 1.5	55	17
3/8"				
613838	4.150 / 60.000	M20 x 1.5	69	22
613838-I	4.150 / 60.000	3/4" - 16UNF	69	13/16"
613838-P	6.200 / 90.000	M20 x 1.5	69	22
9/16"				
619191	4.150 / 60.000	M30 x 2	91	32
619191-I	4.150 / 60.000	1 1/8" - 12UNF	91	1 3/16"
619191-P	6.200 / 90.000	M30 x 2	91	32
1/4" - 3/8"				
611438	4.150 / 60.000	M16 x 1.5 / M20 x 1.5	63	22

Weitere Informationen unter

ALLFI website : allfi.com
 ALLFI webshop : allfiwaterjetparts.com
 Kontakt : info@allfi.com

