
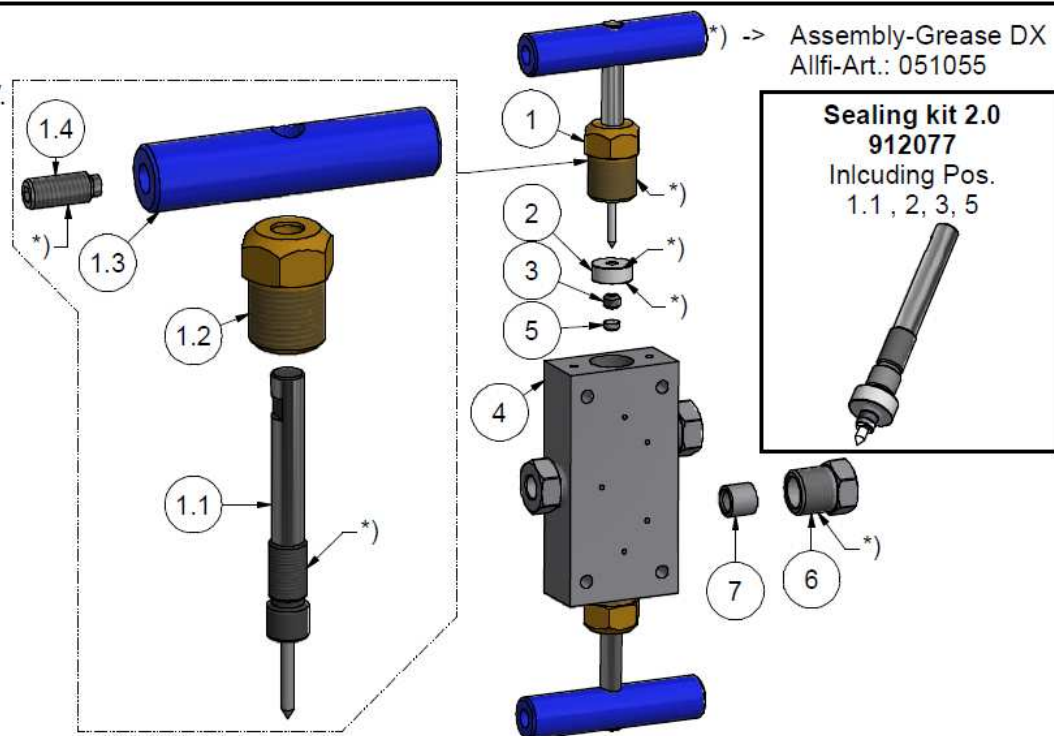
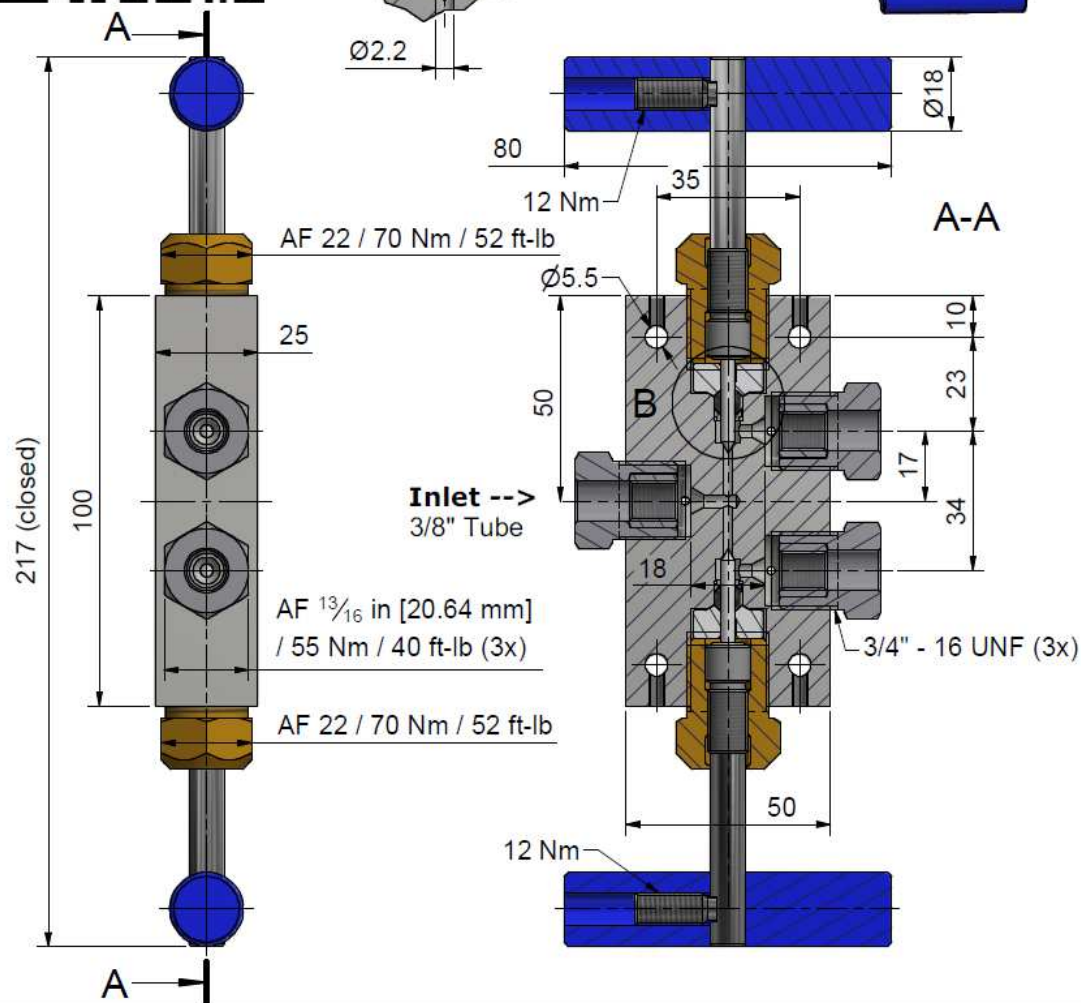


Assembling - Maintenance

This drawing is appendix A of the installation and maintenance instruction "Hand valve 2.0".
Complete installation and maintenance instruction refer to QR-Code or:
<https://www.allfi.com/en/services/downloads/product-manuals/>

- Pressure relief holes must not be covered or closed.

Detail B (3 : 2)



Item	Qty	Description	Part-Number	Comments	Weight
1	2	Spindle complete 2.0	910062		167.8 g
1.1	1	Needle with spindle 2.0	912059	Wear part	39.9 g
1.2	1	Spindle Nut 2.0	912058		73 g
1.3	1	Clamp Handle 2.0	912057		48.2 g
1.4	1	Screw	000044		6.7 g
2	2	Pressure plate 2.0	912053	Wear part	11.8 g
3	2	HP-Seal 2.0	912052	Wear part	1 g
4	1	Valve body 2-stem 3/8" 2.0 Imp	912068-I	Wear part	747.7 g
5	2	Conical disc 2.0	912062	Wear part	0.4 g
6	3	Gland Nut 3/8" Imp	703807		40.8 g
7	3	Collar 3/8"	713800		6.8 g

General tolerances ISO 2768-1 mK Designs and drawings created and produced by the contractor are the contractor's intellectual property and may only be used for the purposes of the order.

Amendment:	Replace for 912013-I, 911000-I
Replaced by	-
Drawn	06.09.2016 AM
Checked	03.05.2017 RB
Release	29.05.2017 BT
Index-release	

Hand Valve 3-Way 2 Stem 3/8" 2.0 Imp

Scale
3 : 4

Max 4150 bar / 60,000 psi
Hand Valve 2.0



ALLFI AG - RIEDENMATT 1 - CH-6370 STANS

PHONE +41(0)41-618 05 05

E-MAIL: sales@allfi.com

<http://www.allfi.com>

911010-I

Index	Sheet-No.	No. of sheets
-	2	2