




VFT


Kreuzstück

Eigenschaften

- Geeignet für den Einsatz bis zu 4.150 bar/ 60.000 psi oder 6.200 bar/ 90.000 psi
- Verfügbar in metrisch oder imperial
- Sonderabmessungen auf Anfrage



Technische Daten

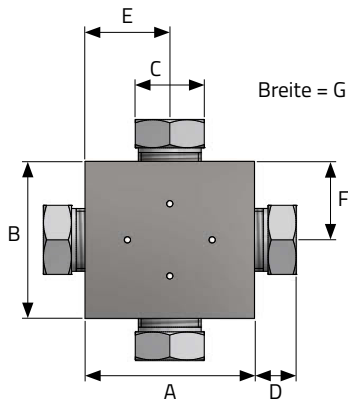

Artikel Nummer	Max. Druck [bar/psi]	Gewindeabmessungen	Maße [mm]						
			A	B	C	D	E	F	G
1/4"									
401414	4.150 / 60.000	M16 x 1.5	44	32	17	13	22	16	20
401414-I	4.150 / 60.000	9/16" - 18UNF	50	32	5/8"	13	25	16	25
401414-P	6.200 / 90.000	M16 x 1.5	44	32	17	13	22	16	20
3/8"									
403838	4.150 / 60.000	M20 x 1.5	54	50	22	13	27	25	25
403838-I	4.150 / 60.000	3/4" - 16UNF	54	50	13/16"	12	27	25	25
403838-P	6.200 / 90.000	M20 x 1.5	54	50	22	13	27	25	25
9/16"									
409191	4.150 / 60.000	M30 x 2	80	65	32	18	40	32.5	40
409191-I	4.150 / 60.000	1 1/8" - 12UNF	70	67	1 3/16"	18	35	33.5	40
409191-P	6.200 / 90.000	M30 x 2	80	65	32	18	40	32.5	40

Weitere Informationen unter

ALLFI website : allfi.com
 ALLFI webshop : allfiwaterjetparts.com
 Kontakt : info@allfi.com

